

35 TON PAVER SPECIAL LOWBOY



Model PLBT35-2 Comes Equipped With These Standard Features!



6' Beavertail allows for low angled approach.



Full width gradual slope to upper deck means utilizing upper deck space for loading.



Hutch 9700 Spring suspension ● 255/70R 22.5 (H) Low profile steel belted radials ● Outboard mounted oil bath hubs ● 10-Hole Budd wheels




Standard 8'x3' hydraulic ramps with electric over hydraulic power unit makes loading fast and easy.



Continuous beam design ensures added trailer strength.



9 "D" rings per side, mid span turn signals, and flag holders as standard equipment.

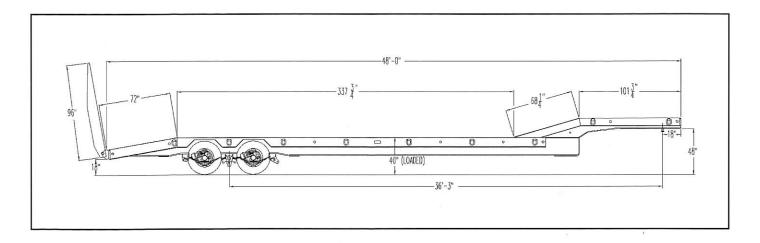

35 TON PAVER SPECIAL LOWBOY

Model # PLBT35-2

STANDARD FEATURES:

- 48' Overall Length
- 102" Overall Width
- 6' Beavertail
- 8'x3' Hydraulic Ramps with Electric over Hydraulic Power Unit
- Covered Rear Deck
- Lockable Tool Box in Neck
- 2 Speed Crank Landing Gear
- 2" Oak Decking on Load Deck
- Pressure Treated Pine on Upper Deck
- 9 "D" Rings per Side
- Mid-Span Turn Signals

- 40" Load Deck Height
- 28' Load Deck Length
- Sealed Beam Lighting
- Hutch 9700 Spring Suspension
- 10-Hole Budd Wheels
- 255/70R 22.5 Low Profile Tires 16 Ply
- Outboard Mount Hubs
- Parking Brake
- Anti-Lock Brake System
- Automatic Slack Adjusters
- Choice of Standard Colors
- Flag Holders

Trailers are of solid weld pierced beam construction.



5007 Inner Perimeter Rd.
Valdosta, Georgia 31603-1286
(229) 241-8929 • Fax (229) 219-7235