# WALLACE TRAILERS

## **50 TON DETACHABLE**

**Non-Ground Bearing** 



# Model DLBT50-3 Comes Equipped With These Standard Features!



Adjustable ride heights eliminates problems with crossing railroad tracks, loading (unloading) on soft ground and getting into job sites.



Non-Ground Bearing Neck w/self-contained pony motor. Selfaligning neck for easy detaching.




Hutch 9700 Spring suspension • 255/70R 22.5 (H)
Low profile steel belted radials • Outboard mounted oil bath hubs • 10-Hole Budd wheels.




Covered rear deck adds 13' of usable space.



28" wide w/20° approach and 10° ramp extended front slopes.



9 Heavy Duty "D" Rings per side • Load bearing outriggers - spaced every 24".

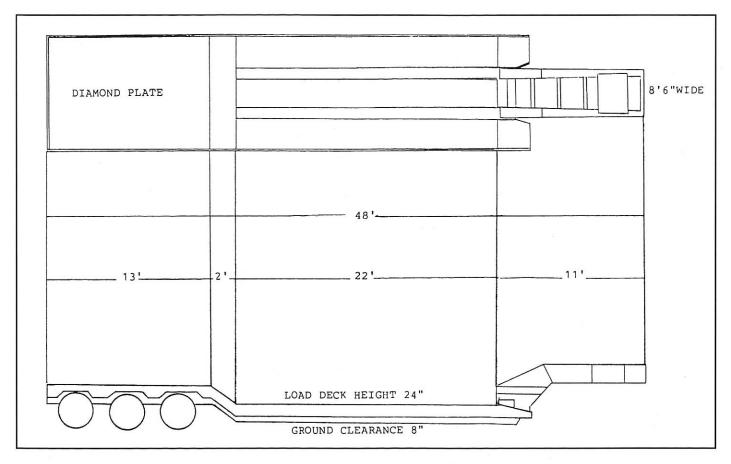

### **50 TON DETACHABLE LOWBOY TRAILER**

#### Model # DLBT50-3

#### **STANDARD FEATURES:**

- 11' Hydraulic Detachable Non-Ground Bearing Neck with Self Contained Electric Start Gasoline Engine
- 48' Overall Length
- 8'6" Overall Width
- 22' Load Deck
- 2" Rough Cut Oak Deck
- Outriggers on 2' Centers
- 8" Ground Clearance
- 24" Deck Height
- Full Width Ramp to Rear Deck

- Heavy Duty Bolsters in Front Of and Between All Axles
- Hutch 9700 Spring Suspension
- 255/70R 22.5 Low Profile Steel Belted Radials
- 10-Hole Budd Wheels
- Outboard Mounted Brake Drums
- 9 "D" Rings Per Side
- Extended Front Slope
- Lighting That Meets or Exceeds Dot Requirements
- Paint: Choice of our standard colors

Trailers are of solid weld pierced beam construction.

Available in a 40 Ton and 60 Ton Model



P.O. Box 1286 • 2299 Hwy. 84 E. Valdosta, Georgia 31603-1286 (912) 241-8929 • Fax (912) 241-8940